
Bayesian inference of COVID-19

Release 0.1.9

Jonas Dehning, Johannes Zierenberg, F. Paul Spitzner, Michael W

Mar 11, 2021

CONTENTS

1	Installation	1
2	First Steps	3
3	Examples	5
4	Disclaimer	7
5	Model	9
5.1	Example	9
5.2	Model Base Class	11
5.3	Compartmental models	12
5.4	Likelihood	15
5.5	Spreading Rate	16
5.6	Delay	16
5.7	Week modulation	18
5.8	Utility	19
6	Data Retrieval	21
6.1	Utility	21
6.2	Johns Hops University	22
6.3	Robert Koch Institute	24
6.4	Robert Koch Institute situation reports	26
6.5	Google	27
6.6	Our World in Data	28
6.7	Financial times	29
6.8	Oxford COVID-19 Government Response Tracker	30
6.9	Base Retrieval Class	31
7	Plotting	33
7.1	High level functions	34
7.2	Low level functions	35
7.3	Helper functions	37
8	Variables saved in the trace	41
9	Contributing	43
9.1	Beginning	43
9.2	Code formatting	43
9.3	Testing	43
9.4	Documentation	44

10 Debugging	45
10.1 General approach for nans/inf during sampling	45
10.2 Sampler: MCMC (Nuts)	46
10.3 Sampler: Variational Inference	47
11 Indices and tables	49
Bibliography	51
Python Module Index	53
Index	55

INSTALLATION

There exists three different possibilities to run the models:

1. Clone the repository, with the latest release:

```
git clone --branch v0.1.8 https://github.com/Priesemann-Group/covid19_inference
```

2. Install the module via pip

```
pip install git+https://github.com/Priesemann-Group/covid19_inference.git@v0.1.8
```

3. Run the notebooks directly in Google Colab. At the top of the notebooks files there should be a symbol which opens them directly in a Google Colab instance.

FIRST STEPS

To get started, we recommend to look at one of the currently two example notebooks:

1. **SIR model with one german state** This model is similar to the one discussed in our paper: [Inferring COVID-19 spreading rates and potential change points for case number forecasts](#). The difference is that the delay between infection and report is now lognormal distributed and not fixed.
2. **Hierarchical model of the German states** This builds a hierarchical bayesian model of the states of Germany. Caution, seems to be currently broken!

We can for example recommend the following articles about bayesian modeling:

As a introduction to Bayesian statistics and the python package (PyMC3) that we use: https://docs.pymc.io/notebooks/api_quickstart.html

This is a good post about hierarchical Bayesian models in general: <https://statmodeling.stat.columbia.edu/2014/01/21/everything-need-know-bayesian-statistics-learned-eight-schools/>

EXAMPLES

We supply a number of examples which can be found in the [scripts](#) folder of the github repository.

These examples are given as python files and interactive ipython notebooks. The python files get automatically converted into ipython notebooks for easier use with google colab. The conversion is done by a slightly modified version of the [python2jupyter module](#), which can be found [here](#).

For starters the most useful examples are the non hierarchical [one bundesland example](#) and the [hierarchical analysis of the bundeslaender](#).

DISCLAIMER

We evaluate the data provided by the John Hopkins University [link](#). We exclude any liability with regard to the quality and accuracy of the data used, and also with regard to the correctness of the statistical analysis. The evaluation of the different growth phases represents solely our personal opinion.

The number of cases reported may be significantly lower than the number of people actually infected. Also, we must point out that week-ends and changes in the test system may lead to fluctuations in reported cases that have no equivalent in actual case numbers.

Certainly, at this stage all statistical predictions are subject to great uncertainty because the general trends of the epidemic are not yet clear. In any case, the statistical trends that we interpret from the data are only suitable for predictions if the measures taken by the government and authorities to contain the pandemic remain in force and are being followed by the population. We must also point out that, even if the statistics indicate that the epidemic is under control, we may at any time see a resurgence of infection figures until the disease is eradicated worldwide.

MODEL

If you are familiar with `pymc3`, then looking at the example below should explain how our model works. Otherwise, here is a quick overview:

- First, we have to create an instance of the base class (that is derived from `pymc3`'s model class). It has some convenient properties to get the range of the data, simulation length and so forth.
- We then add details that base model. They correspond to the actual (physical) model features, such as the change points, the reporting delay and the week modulation.
 - Every feature has its own function that takes in arguments to set prior assumptions.
 - Sometimes they also take in input (data, reported cases ...) but none of the function performs any actual modifications on the data. They only tell `pymc3` what it is supposed to do during the sampling.
 - None of our functions actually modifies any data. They rather define ways how `pymc3` should modify data during the sampling.
 - Most of the feature functions add variables to the `pymc3.trace`, see the function arguments that start with `name_`.
- in `pymc3` it is common to use a context, as we also do in the example. everything within the block with `cov19.model.Cov19Model(**params_model)` as `this_model`: automatically applies to `this_model`. Alternatively, you could provide a keyword to each function `model=this_model`.

5.1 Example

```
import datetime

import pymc3 as pm
import numpy as np
import covid19_inference as cov19

# limit the data range
bd = datetime.datetime(2020, 3, 2)

# download data
jhu = cov19.data_retrieval.JHU(auto_download=True)
new_cases = jhu.get_new(country="Germany", data_begin=bd)

# set model parameters
params_model = dict(
    new_cases_obs=new_cases,
    data_begin=bd,
```

(continues on next page)

(continued from previous page)

```

    fcast_len=28,
    diff_data_sim=16,
    N_population=83e6,
)

# change points like in the paper
change_points = [
    dict(pr_mean_date_transient=datetime.datetime(2020, 3, 9)),
    dict(pr_mean_date_transient=datetime.datetime(2020, 3, 16)),
    dict(pr_mean_date_transient=datetime.datetime(2020, 3, 23)),
]

# create model instance and add details
with cov19.model.Cov19Model(**params_model) as this_model:
    # apply change points, lambda is in log scale
    lambda_t_log = cov19.model.lambda_t_with_sigmoids(
        pr_median_lambda_0=0.4,
        pr_sigma_lambda_0=0.5,
        change_points_list=change_points,
    )

    # prior for the recovery rate
    mu = pm.Lognormal(name="mu", mu=np.log(1 / 8), sigma=0.2)

    # new Infected day over day are determined from the SIR model
    new_I_t = cov19.model.SIR(lambda_t_log, mu)

    # model the reporting delay, our prior is ten days
    new_cases_inferred_raw = cov19.model.delay_cases(
        cases=new_I_t,
        pr_mean_of_median=10,
    )

    # apply a weekly modulation, fewer reports during weekends
    new_cases_inferred = cov19.model.week_modulation(new_cases_inferred_raw)

    # set the likelihood
    cov19.model.student_t_likelihood(new_cases_inferred)

# run the sampling
trace = pm.sample(model=this_model, tune=50, draws=10, init="advi+adapt_diag")

```

Table of Contents

- *Model*
 - *Example*
 - *Model Base Class*
 - *Compartmental models*
 - *Likelihood*
 - *Spreading Rate*
 - *Delay*

- *Week modulation*
- *Utility*

5.2 Model Base Class

```
class covid19_inference.model.Cov19Model(new_cases_obs, data_begin, fcast_len,
                                         diff_data_sim, N_population, name="",
                                         model=None)
```

Abstract base class for the dynamic model of covid-19 propagation. Derived from `pymc3.Model`.

Parameters below are passed to the constructor.

Attributes (Variables) are available after creation and can be accessed from every instance. Some background:

- The simulation starts *diff_data_sim* days before the data.
- The data has a certain length, on which the inference is based. This length is given by *new_cases_obs*.
- After the inference, a forecast takes of length *fcast_len* takes place, starting on the day after the last data point in *new_cases_obs*.
- In total, traces produced by a model run have the length $sim_len = diff_data_sim + data_len + fcast_len$
- Date ranges include both boundaries. For example, if *data_begin* is March 1 and *data_end* is March 3 then *data_len* will be 3.

Parameters

- **new_cases_obs** (*1 or 2d array*) – If the array is two-dimensional, an hierarchical model will be constructed. First dimension is then time, the second the region/country.
- **data_begin** (*datetime.datetime*) – Date of the first data point
- **fcast_len** (*int*) – Number of days the simulations runs longer than the data
- **diff_data_sim** (*int*) – Number of days the simulation starts earlier than the data. Should be significantly longer than the delay between infection and report of cases.
- **N_population** (*number or 1d array*) – Number of inhabitation in region, needed for the S(E)IR model. Is ideally 1 dimensional if *new_cases_obs* is 2 dimensional
- **name** (*string*) – suffix appended to the name of random variables saved in the trace
- **model** – specify a model, if this one should expand another

Variables

- **new_cases_obs** (*1 or 2d array*) – as passed during construction
- **data_begin** (*datetime.datetime*) – date of the first data point in the data
- **data_end** (*datetime.datetime*) – date of the last data point in the data
- **sim_begin** (*datetime.datetime*) – date at which the simulation begins
- **sim_end** (*datetime.datetime*) – date at which the simulation ends (should match *fcast_end*)
- **fcast_begin** (*datetime.datetime*) – date at which the forecast starts (should be one day after *data_end*)
- **fcast_end** (*datetime.datetime*) – data at which the forecast ends

- **data_len** (*int*) – total number of days in the data
- **sim_len** (*int*) – total number of days in the simulation
- **fcast_len** (*int*) – total number of days in the forecast
- **diff_data_sim** (*int*) – difference in days between the simulation begin and the data begin. The simulation starting time is usually earlier than the data begin.

Example

```
with Cov19Model(**params) as model:
    # Define model here
```

property untransformed_freeRVs

Returns the names of all free parameters of the model, usefull for plotting!

Returns *list* – all variable names

5.3 Compartmental models

5.3.1 SIR — susceptible-infected-recovered

```
covid19_inference.model.SIR(lambda_t_log, mu, name_new_I_t='new_I_t',
                             name_I_begin='I_begin', name_I_t='I_t', name_S_t='S_t',
                             pr_I_begin=100, model=None, return_all=False)
```

Implements the susceptible-infected-recovered model.

Parameters

- **lambda_t_log** (TensorVariable) – time series of the logarithm of the spreading rate, 1 or 2-dimensional. If 2-dimensional the first dimension is time.
- **mu** (TensorVariable) – the recovery rate μ , typically a random variable. Can be 0 or 1-dimensional. If 1-dimensional, the dimension are the different regions.
- **name_new_I_t** (*str*, *optional*) – Name of the new_I_t variable
- **name_I_begin** (*str*, *optional*) – Name of the I_begin variable
- **name_I_t** (*str*, *optional*) – Name of the I_t variable, set to None to avoid adding as trace variable.
- **name_S_t** (*str*, *optional*) – Name of the S_t variable, set to None to avoid adding as trace variable.
- **pr_I_begin** (float or array_like or Variable) – Prior beta of the Half-Cauchy distribution of $I(0)$. if type is `tt.Constant`, I_begin will not be inferred by pymc3
- **model** (*Cov19Model*) – if none, it is retrieved from the context
- **return_all** (*bool*) – if True, returns name_new_I_t, name_I_t, name_S_t otherwise returns only name_new_I_t

Returns

- **new_I_t** (TensorVariable) – time series of the number daily newly infected persons.
- **I_t** (TensorVariable) – time series of the infected (if return_all set to True)

- **S_t** (TensorVariable) – time series of the susceptible (if return_all set to True)

5.3.2 More Details

$$I_{new}(t) = \lambda_t I(t-1) \frac{S(t-1)}{N}$$

$$S(t) = S(t-1) - I_{new}(t)$$

$$I(t) = I(t-1) + I_{new}(t) - \mu I(t)$$

The prior distributions of the recovery rate μ and $I(0)$ are set to

$$\mu \sim \text{LogNormal}[\log(\text{pr_median_mu}), \text{pr_sigma_mu}]$$

$$I(0) \sim \text{HalfCauchy}[\text{pr_beta_I_begin}]$$

5.3.3 SEIR-like — susceptible-exposed-infected-recovered

```
covid19_inference.model.SEIR(lambda_t_log,          mu,          name_new_I_t='new_I_t',
                               name_new_E_t='new_E_t',    name_I_t='I_t',    name_S_t='S_t',
                               name_I_begin='I_begin',    name_new_E_begin='new_E_begin',
                               name_median_incubation='median_incubation',
                               pr_I_begin=100, pr_new_E_begin=50, pr_median_mu=0.125,
                               pr_mean_median_incubation=4, pr_sigma_median_incubation=1,
                               sigma_incubation=0.4, pr_sigma_mu=0.2, model=None, re-
                               turn_all=False)
```

Implements a model similar to the susceptible-exposed-infected-recovered model. Instead of an exponential decaying incubation period, the length of the period is lognormal distributed.

Parameters

- **lambda_t_log** (TensorVariable) – time series of the logarithm of the spreading rate, 1 or 2-dimensional. If 2-dimensional, the first dimension is time.
- **mu** (TensorVariable) – the recovery rate μ , typically a random variable. Can be 0 or 1-dimensional. If 1-dimensional, the dimension are the different regions.
- **name_new_I_t** (*str*, optional) – Name of the new_I_t variable
- **name_I_t** (*str*, optional) – Name of the I_t variable
- **name_S_t** (*str*, optional) – Name of the S_t variable
- **name_I_begin** (*str*, optional) – Name of the I_begin variable
- **name_new_E_begin** (*str*, optional) – Name of the new_E_begin variable
- **name_median_incubation** (*str*) – The name under which the median incubation time is saved in the trace
- **pr_I_begin** (*float* or *array_like*) – Prior beta of the [HalfCauchy](#) distribution of $I(0)$. if type is `tt.Variable`, I_begin will be set to the provided prior as a constant.
- **pr_new_E_begin** (*float* or *array_like*) – Prior beta of the [HalfCauchy](#) distribution of $E(0)$.
- **pr_median_mu** (*float* or *array_like*) – Prior for the median of the [Lognormal](#) distribution of the recovery rate μ .

- **pr_mean_median_incubation** – Prior mean of the `Normal` distribution of the median incubation delay $d_{\text{incubation}}$. Defaults to 4 days [Nishiura2020], which is the median serial interval (the important measure here is not exactly the incubation period, but the delay until a person becomes infectious which seems to be about 1 day earlier as showing symptoms).
- **pr_sigma_median_incubation** (*number or None*) – Prior sigma of the `Normal` distribution of the median incubation delay $d_{\text{incubation}}$. If None, the incubation time will be fixed to the value of `pr_mean_median_incubation` instead of a random variable Default is 1 day.
- **sigma_incubation** – Scale parameter of the `Lognormal` distribution of the incubation time/ delay until infectiousness. The default is set to 0.4, which is about the scale found in [Nishiura2020], [Lauer2020].
- **pr_sigma_mu** (*float or array_like*) – Prior for the sigma of the lognormal distribution of recovery rate μ .
- **model** (*Cov19Model*) – if none, it is retrieved from the context
- **return_all** (*bool*) – if True, returns `name_new_I_t`, `name_new_E_t`, `name_I_t`, `name_S_t` otherwise returns only `name_new_I_t`

Returns

- **name_new_I_t** (*TensorVariable*) – time series of the number daily newly infected persons.
- **name_new_E_t** (*TensorVariable*) – time series of the number daily newly exposed persons. (if `return_all` set to True)
- **name_I_t** (*TensorVariable*) – time series of the infected (if `return_all` set to True)
- **name_S_t** (*TensorVariable*) – time series of the susceptible (if `return_all` set to True)

5.3.4 More Details

$$\begin{aligned}
 E_{\text{new}}(t) &= \lambda_t I(t-1) \frac{S(t)}{N} \\
 S(t) &= S(t-1) - E_{\text{new}}(t) \\
 I_{\text{new}}(t) &= \sum_{k=1}^{10} \beta(k) E_{\text{new}}(t-k) \\
 I(t) &= I(t-1) + I_{\text{new}}(t) - \mu I(t) \\
 \beta(k) &= P(k) \sim \text{LogNormal}[\log(d_{\text{incubation}}), \text{sigma_incubation}]
 \end{aligned}$$

The recovery rate μ and the incubation period is the same for all regions and follow respectively:

$$\begin{aligned}
 P(\mu) &\sim \text{LogNormal}[\log(\text{pr_median_mu}), \text{pr_sigma_mu}] \\
 P(d_{\text{incubation}}) &\sim \text{Normal}[\text{pr_mean_median_incubation}, \text{pr_sigma_median_incubation}]
 \end{aligned}$$

The initial number of infected and newly exposed differ for each region and follow prior `HalfCauchy` distributions:

$$\begin{aligned}
 E(t) &\sim \text{HalfCauchy}[\text{pr_beta_E_begin}] \quad \text{for } t \in -9, -8, \dots, 0 \\
 I(0) &\sim \text{HalfCauchy}[\text{pr_beta_I_begin}].
 \end{aligned}$$

5.3.5 References

-
-

5.4 Likelihood

```
covid19_inference.model.student_t_likelihood(cases, name_student_t='_new_cases_studentT',
                                             name_sigma_obs='sigma_obs',
                                             pr_beta_sigma_obs=30,          nu=4,
                                             offset_sigma=1,              model=None,
                                             data_obs=None)
```

Set the likelihood to apply to the model observations (`model.new_cases_obs`) We assume a `StudentT` distribution because it is robust against outliers [Lange1989]. The likelihood follows:

$$P(\text{data_obs}) \sim \text{StudentT}(\mu = \text{new_cases_inferred}, \sigma = \sigma_r, \text{nu} = \text{nu})$$

$$\sigma = \sigma_r \sqrt{\text{new_cases_inferred} + \text{offset_sigma}}$$

The parameter σ_r follows a `HalfCauchy` prior distribution with parameter beta set by `pr_beta_sigma_obs`. If the input is 2 dimensional, the parameter σ_r is different for every region.

Parameters

- **cases** (`TensorVariable`) – The daily new cases estimated by the model. Will be compared to the real world data `data_obs`. One or two dimensional array. If 2 dimensional, the first dimension is time and the second are the regions/countries
- **name_student_t** – The name under which the studentT distribution is saved in the trace.
- **name_sigma_obs** – The name under which the distribution of the observable error is saved in the trace
- **pr_beta_sigma_obs** (`float`) – The beta of the `HalfCauchy` prior distribution of σ_r .
- **nu** (`float`) – How flat the tail of the distribution is. Larger nu should make the model more robust to outliers. Defaults to 4 [Lange1989].
- **offset_sigma** (`float`) – An offset added to the sigma, to make the inference procedure robust. Otherwise numbers of cases would lead to very small errors and diverging likelihoods. Defaults to 1.
- **model** – The model on which we want to add the distribution
- **data_obs** (`array`) – The data that is observed. By default it is `model.new_cases_obs`

Returns *None*

References

5.5 Spreading Rate

```
covid19_inference.model.lambda_t_with_sigmoids (change_points_list,
                                                pr_median_lambda_0,
                                                pr_sigma_lambda_0=0.5, model=None,
                                                name_lambda_t='lambda_t')
```

Builds a time dependent spreading rate λ_t with change points. The change points are marked by a transient with a sigmoidal shape, with at

Parameters

- **change_points_list** –
- **pr_median_lambda_0** –
- **pr_sigma_lambda_0** –
- **model** (*Cov19Model*) – if none, it is retrieved from the context

Returns *lambda_t_log*

Todo: Documentation on this

5.6 Delay

```
covid19_inference.model.delay_cases (cases,      name_delay='delay',      name_cases=None,
                                       name_width='delay-width',  pr_mean_of_median=10,
                                       pr_sigma_of_median=0.2,    pr_median_of_width=0.3,
                                       pr_sigma_of_width=None,    model=None,
                                       len_input_arr=None,        len_output_arr=None,
                                       diff_input_output=None)
```

Convolves the input by a lognormal distribution, in order to model a delay:

- We have a kernel (a distribution) of delays, one realization of this kernel is applied to each pymc3 sample.
- The kernel has a median delay D and a width that correspond to this one sample. Doing the ensemble average over all samples and the respective kernels, we get two distributions: one of the median delay D and one of the width.
- The (normal) distribution of the median of D is specified using *pr_mean_of_median* and *pr_sigma_of_median*.
- The (lognormal) distribution of the width of the kernel of D is specified using *pr_median_of_width* and *pr_sigma_of_width*. If *pr_sigma_of_width* is None, the width is fixed (skipping the second distribution).

Parameters

- **cases** (*TensorVariable*) – The input, typically the number of newly infected cases from the output of *SIR()* or *SEIR()*.
- **name_delay** (*str*) – The name under which the delay is saved in the trace, suffixes and prefixes are added depending on which variable is saved. Default : “delay”
- **name_cases** (*str* or *None*) – The name under which the delayed cases are saved in the trace. If None, no variable will be added to the trace. Default: “delayed_cases”

- **pr_mean_of_median** (*float*) – The mean of the `normal` distribution which models the prior median of the `LogNormal` delay kernel. Default: 10.0 (days)
- **pr_sigma_of_median** (*float*) – The standart devaiation of `normal` distribution which models the prior median of the `LogNormal` delay kernel. Default: 0.2
- **pr_median_of_width** (*float*) – The scale (width) of the `LogNormal` delay kernel. Default: 0.3
- **pr_sigma_of_width** (*float or None*) – Whether to put a prior distribution on the scale (width) of the distribution of the delays, too. If a number is provided, the scale of the delay kernel follows a prior `LogNormal` distribution, with median `pr_median_scale_delay` and scale `pr_sigma_scale_delay`. Default: `None`, and no distribution is applied.
- **model** (*Cov19Model or None*) – The model to use. Default: `None`, model is retrieved automatically from the context

Other Parameters

- **len_input_arr** – Length of `new_I_t`. By default equal to `model.sim_len`. Necessary because the shape of theano tensors are not defined at when the graph is built.
- **len_output_arr** (*int*) – Length of the array returned. By default it set to the length of the `cases_obs` saved in the model plus the number of days of the forecast.
- **diff_input_output** (*int*) – Number of days the returned array begins later then the input. Should be significantly larger than the median delay. By default it is set to the `model.diff_data_sim`.

Returns **delayed_cases** (`TensorVariable`) – The delayed input $y_{\text{delayed}}(t)$, typically the daily number new cases that one expects to measure.

5.6.1 More Details

$$y_{\text{delayed}}(t) = \sum_{\tau=0}^T y_{\text{input}}(\tau) \text{LogNormal}[\log(\text{delay}), \text{pr_median_scale_delay}](t - \tau)$$

$$\log(\text{delay}) = \text{Normal}[\log(\text{pr_sigma_delay}), \text{pr_sigma_delay}]$$

The *LogNormal* distribution is a function evaluated at $t - \tau$.

If the model is 2-dimensional (hierarchical), the $\log(\text{delay})$ is hierarchically modelled with the `hierarchical_normal()` function using the default parameters except that the prior *sigma* of *delay_L2* is `HalfNormal` distributed (`error_cauchy=False`).

5.7 Week modulation

```
covid19_inference.model.week_modulation(cases, name_cases=None,
                                         name_weekend_factor='weekend_factor',
                                         name_offset_modulation='offset_modulation',
                                         week_modulation_type='abs_sine',
                                         pr_mean_weekend_factor=0.3,
                                         pr_sigma_weekend_factor=0.5, week-
                                         end_days=(6, 7), model=None)
```

Adds a weekly modulation of the number of new cases:

$$\text{new_cases} = \text{new_cases_raw} \cdot (1 - f(t)), \quad \text{with}$$

$$f(t) = f_w \cdot \left(1 - \left| \sin \left(\frac{\pi}{7}t - \frac{1}{2}\Phi_w \right) \right| \right),$$

if `week_modulation_type` is "abs_sine" (the default). If `week_modulation_type` is "step", the new cases are simply multiplied by the weekend factor on the days set by `weekend_days`

The weekend factor f_w follows a Lognormal distribution with median `pr_mean_weekend_factor` and sigma `pr_sigma_weekend_factor`. It is hierarchically constructed if the input is two-dimensional by the function `hierarchical_normal()` with default arguments.

The offset from Sunday Φ_w follows a flat `VonMises` distribution and is the same for all regions.

Parameters

- **cases** (TensorVariable) – The input array of daily new cases, can be one- or two-dimensional
- **name_cases** (*str* or *None*,) – The name under which to save the cases as a trace variable. Default: None, cases are not stored in the trace.
- **week_modulation_type** (*str*) – The type of modulation, accepts "step" or "abs_sine" (the default).
- **pr_mean_weekend_factor** (*float*) – Sets the prior mean of the factor f_w by which weekends are counted.
- **pr_sigma_weekend_factor** (*float*) – Sets the prior sigma of the factor f_w by which weekends are counted.
- **weekend_days** (*tuple of ints*) – The days counted as weekend if `week_modulation_type` is "step"
- **model** (*Cov19Model*) – if none, it is retrieved from the context

Returns `new_cases` (TensorVariable)

5.8 Utility

```
covid19_inference.model.utility.hierarchical_normal(pr_mean, pr_sigma,
                                                    name_L1='delay_hc_L1',
                                                    name_L2='delay_hc_L2',
                                                    name_sigma='delay_hc_sigma',
                                                    model=None, error_fact=2.0,
                                                    error_cauchy=True)
```

Implements an hierarchical normal model:

$$\begin{aligned}x_{L1} &= \text{Normal}(\text{pr_mean}, \text{pr_sigma}) \\ y_{i,L2} &= \text{Normal}(x_{L1}, \sigma_{L2}) \\ \sigma_{L2} &= \text{HalfCauchy}(\text{error_fact} \cdot \text{pr_sigma})\end{aligned}$$

It is however implemented in a non-centered way, that the second line is changed to:

$$y_{i,L2} = x_{L1} + \text{Normal}(0, 1) \cdot \sigma_{L2}$$

See for example <https://arxiv.org/pdf/1312.0906.pdf>

Parameters

- **name_L1** (*str*) – Name under which x_{L1} is saved in the trace.
- **name_L2** (*str*) – Name under which x_{L2} is saved in the trace. The non-centered distribution in addition saved with a suffix `_raw` added.
- **name_sigma** (*str*) – Name under which σ_{L2} is saved in the trace.
- **pr_mean** (*float*) – Prior mean of x_{L1}
- **pr_sigma** (*float*) – Prior sigma for x_{L1} and (multiplied by `error_fact`) for σ_{L2}
- **len_L2** (*int*) – length of y_{L2}
- **error_fact** (*float*) – Factor by which `pr_sigma` is multiplied as prior for σ_{L2}
- **error_cauchy** (*bool*) – if False, a *HalfNormal* distribution is used for σ_{L2} instead of *HalfCauchy*

Returns

- **y** (*TensorVariable*) – the random variable y_{L2}
- **x** (*TensorVariable*) – the random variable x_{L1}

```
covid19_inference.model.utility.tt_lognormal(x, mu, sigma)
```

Calculates a lognormal pdf for integer spaced x input.

```
covid19_inference.model.utility.tt_gamma(x, mu=None, sigma=None, alpha=None,
                                          beta=None)
```

Calculates a gamma distribution pdf for integer spaced x input. Parametrized similarly to `Gamma`

DATA RETRIEVAL

Table of Contents

- *Data Retrieval*
 - *Utility*
 - *Johns Hops University*
 - *Robert Koch Institute*
 - *Robert Koch Institute situation reports*
 - *Google*
 - *Our World in Data*
 - *Financial times*
 - *Oxford COVID-19 Government Response Tracker*
 - *Base Retrieval Class*

6.1 Utility

`covid19_inference.data_retrieval.retrieval.set_data_dir` (*fname=None*, *permissions=None*)

Set the global variable `_data_dir`. New downloaded data is placed there. If no argument provided we try the default tmp directory. If permissions are not provided, uses defaults if *fname* is in user folder. If not in user folder, tries to set 777.

`covid19_inference.data_retrieval.retrieval.backup_instances` (*trace=None*,
model=None,
fname='latest_')

helper to save or load trace and model instances. loads from *fname* if provided traces and model variables are None, else saves them there.

6.2 Johns Hops University

class covid19_inference.data_retrieval.JHU(*auto_download=False*)

This class can be used to retrieve and filter the dataset from the online repository of the coronavirus visual dashboard operated by the [Johns Hopkins University](#).

Features

- download all files from the online repository of the coronavirus visual dashboard operated by the Johns Hopkins University.
- filter by deaths, confirmed cases and recovered cases
- filter by country and state
- filter by date

Example

```
jhu = cov19.data_retrieval.JHU()
jhu.download_all_available_data()

#Access the data by
jhu.data
#or
jhu.get_new("confirmed", "Italy")
jhu.get_total(filter)
```

__init__(*auto_download=False*)

On init of this class the base Retrieval Class **__init__** is called, with jhu specific arguments.

Parameters *auto_download* (*bool*, *optional*) – Whether or not to automatically call the `download_all_available_data()` method. One should explicitly call this method for more configuration options (default: `false`)

download_all_available_data(*force_local=False*, *force_download=False*)

Attempts to download from the main urls (`self.url_csv`) which was set on initialization of this class. If this fails it downloads from the fallbacks. It can also be specified to use the local files or to force the download. The download methods get inherited from the base retrieval class.

Parameters

- **force_local** (*bool*, *optional*) – If True forces to load the local files.
- **force_download** (*bool*, *optional*) – If True forces the download of new files

get_total_confirmed_deaths_recovered(*country: str = None*, *state: str = None*, *begin_date: datetime.datetime = None*, *end_date: datetime.datetime = None*)

Retrieves all confirmed, deaths and recovered cases from the Johns Hopkins University dataset as a DataFrame with datetime index. Can be filtered by country and state, if only a country is given all available states get summed up.

Parameters

- **country** (*str*, *optional*) – name of the country (the “Country/Region” column), can be None if the whole summed up data is wanted (why would you do this?)
- **state** (*str*, *optional*) – name of the state (the “Province/State” column), can be None if country is set or the whole summed up data is wanted

- **begin_date** (*datetime.datetime, optional*) – initial date for the returned data, if no value is given the first date in the dataset is used
- **end_date** (*datetime.datetime, optional*) – last date for the returned data, if no value is given the most recent date in the dataset is used

Returns *pandas.DataFrame*

get_new (*value='confirmed', country: str = None, state: str = None, data_begin: datetime.datetime = None, data_end: datetime.datetime = None*)

Retrieves all new cases from the Johns Hopkins University dataset as a DataFrame with datetime index. Can be filtered by value, country and state, if only a country is given all available states get summed up.

Parameters

- **value** (*str*) – Which data to return, possible values are - “confirmed”, - “recovered”, - “deaths” (default: “confirmed”)
- **country** (*str, optional*) – name of the country (the “Country/Region” column), can be None
- **state** (*str, optional*) – name of the state (the “Province/State” column), can be None
- **begin_date** (*datetime.datetime, optional*) – initial date for the returned data, if no value is given the first date in the dataset is used
- **end_date** (*datetime.datetime, optional*) – last date for the returned data, if no value is given the most recent date in the dataset is used

Returns *pandas.DataFrame* – table with new cases and the date as index

get_total (*value='confirmed', country: str = None, state: str = None, data_begin: datetime.datetime = None, data_end: datetime.datetime = None*)

Retrieves all total/cumulative cases from the Johns Hopkins University dataset as a DataFrame with date-time index. Can be filtered by value, country and state, if only a country is given all available states get summed up.

Parameters

- **value** (*str*) – Which data to return, possible values are - “confirmed”, - “recovered”, - “deaths” (default: “confirmed”)
- **country** (*str, optional*) – name of the country (the “Country/Region” column), can be None
- **state** (*str, optional*) – name of the state (the “Province/State” column), can be None
- **begin_date** (*datetime.datetime, optional*) – initial date for the returned data, if no value is given the first date in the dataset is used
- **end_date** (*datetime.datetime, optional*) – last date for the returned data, if no value is given the most recent date in the dataset is used

Returns *pandas.DataFrame* – table with total/cumulative cases and the date as index

filter_date (*df, begin_date: datetime.datetime = None, end_date: datetime.datetime = None*)

Returns give dataframe between begin and end date. Dataframe has to have a datetime index.

Parameters

- **begin_date** (*datetime.datetime, optional*) – First day that should be filtered

- **end_date** (*datetime.datetime, optional*) – Last day that should be filtered

Returns *pandas.DataFrame*

get_possible_countries_states()

Can be used to get a list with all possible states and countries.

Returns *pandas.DataFrame* in the format

6.3 Robert Koch Institute

class covid19_inference.data_retrieval.**RKI** (*auto_download=False*)

This class can be used to retrieve and filter the dataset from the Robert Koch Institute [Robert Koch Institute](#). The data gets retrieved from the [arcgis](#) dashboard.

Features

- download the full dataset
- filter by date
- filter by bundesland
- filter by recovered, deaths and confirmed cases

Example

```
rki = covid19_inference.data_retrieval.RKI()
rki.download_all_available_data()

#Access the data by
rki.data
#or
rki.get_new("confirmed", "Sachsen")
rki.get_total(filter)
```

__init__ (*auto_download=False*)

On init of this class the base Retrieval Class **__init__** is called, with rki specific arguments.

Parameters **auto_download** (*bool, optional*) – Whether or not to automatically call the `download_all_available_data()` method. One should explicitly call this method for more configuration options (default: false)

download_all_available_data (*force_local=False, force_download=False*)

Attempts to download from the main url (self.url_csv) which was given on initialization. If this fails download from the fallbacks. It can also be specified to use the local files or to force the download. The download methods get inherited from the base retrieval class.

Parameters

- **force_local** (*bool, optional*) – If True forces to load the local files.
- **force_download** (*bool, optional*) – If True forces the download of new files

get_total (*value='confirmed', bundesland: str = None, landkreis: str = None, data_begin: datetime.datetime = None, data_end: datetime.datetime = None, date_type: str = 'date', age_group=None*)

Gets all total confirmed cases for a region as dataframe with date index. Can be filtered with multiple arguments.

Parameters

- **value** (*str*) – Which data to return, possible values are - “confirmed”, - “recovered”, - “deaths” (default: “confirmed”)
- **bundesland** (*str*, *optional*) – if no value is provided it will use the full summed up dataset for Germany
- **landkreis** (*str*, *optional*) – if no value is provided it will use the full summed up dataset for the region (bundesland)
- **data_begin** (*datetime.datetime*, *optional*) – initial date, if no value is provided it will use the first possible date
- **data_end** (*datetime.datetime*, *optional*) – last date, if no value is provided it will use the most recent possible date
- **date_type** (*str*, *optional*) – type of date to use: reported date ‘date’ (Meldedatum in the original dataset), or symptom date ‘date_ref’ (Refdatum in the original dataset)
- **age_group** (*str*, *optional*) – Chosen age group. To get the possible combinations use *possible_age_groups()*.

Returns *pandas.DataFrame*

get_new (*value*='confirmed', *bundesland*: *str* = None, *landkreis*: *str* = None, *data_begin*: *datetime.datetime* = None, *data_end*: *datetime.datetime* = None, *date_type*: *str* = 'date', *age_group*=None)

Retrieves all new cases from the Robert Koch Institute dataset as a DataFrame with datetime index. Can be filtered by value, bundesland and landkreis, if only a country is given all available states get summed up.

Parameters

- **value** (*str*) – Which data to return, possible values are - “confirmed”, - “recovered”, - “deaths” (default: “confirmed”)
- **bundesland** (*str*, *optional*) – if no value is provided it will use the full summed up dataset for Germany
- **landkreis** (*str*, *optional*) – if no value is provided it will use the full summed up dataset for the region (bundesland)
- **data_begin** (*datetime.datetime*, *optional*) – initial date for the returned data, if no value is given the first date in the dataset is used, if none is given could yield errors
- **data_end** (*datetime.datetime*, *optional*) – last date for the returned data, if no value is given the most recent date in the dataset is used
- **age_group** (*str*, *optional*) – Chosen age group. To get the possible combinations use *possible_age_groups()*.

Returns *pandas.DataFrame* – table with daily new confirmed and the date as index

filter (*data_begin*: *datetime.datetime* = None, *data_end*: *datetime.datetime* = None, *variable*='confirmed', *date_type*='date', *level*=None, *value*=None, *age_group*=None)

Filters the obtained dataset for a given time period and returns an array ONLY containing only the desired variable.

Parameters

- **data_begin** (*datetime.datetime*, *optional*) – initial date, if no value is provided it will use the first possible date

- **data_end** (*datetime.datetime*, *optional*) – last date, if no value is provided it will use the most recent possible date
- **variable** (*str*, *optional*) – type of variable to return possible types are: “confirmed” : cases (default) “AnzahlTodesfall” : deaths “AnzahlGenesen” : recovered
- **date_type** (*str*, *optional*) – type of date to use: reported date ‘date’ (Meldedatum in the original dataset), or symptom date ‘date_ref’ (Refdatum in the original dataset)
- **level** (*str*, *optional*) –
possible strings are: “None” : return data from all Germany (default) “Bundesland” : a state “Landkreis” : a region
- **value** (*str*, *optional*) – string of the state/region e.g. “Sachsen”
- **age_group** (*str*, *optional*) – Choosen age group. To get the possible combinations use *possible_age_groups()*.

Returns *pd.DataFrame* – array with ONLY the requested variable, in the requested range. (one dimensional)

filter_all_bundesland (*begin_date: datetime.datetime = None, end_date: datetime.datetime = None, variable='confirmed', date_type='date'*)

Filters the full RKI dataset

Parameters

- **df** (*DataFrame*) – RKI dataframe, from *get_rki()*
- **begin_date** (*datetime.datetime*) – initial date to return
- **end_date** (*datetime.datetime*) – last date to return
- **variable** (*str*, *optional*) – type of variable to return: cases (“AnzahlFall”), deaths (“AnzahlTodesfall”), recovered (“AnzahlGenesen”)
- **date_type** (*str*, *optional*) – type of date to use: reported date ‘date’ (Meldedatum in the original dataset), or symptom date ‘date_ref’ (Refdatum in the original dataset)

Returns *pd.DataFrame* – DataFrame with datetime dates as index, and all German regions (bundesländer) as columns

possible_age_groups ()

Returns the valid age groups in the dataset.

6.4 Robert Koch Institute situation reports

class *covid19_inference.data_retrieval.RKIsituationreports* (*auto_download=False*)

As mentioned by Matthias Linden, the daily situation reports have more available data. This class retrieves this additional data from Matthias website and parses it into the format we use i.e. a datetime index.

Interesting new data is for example ICU cases, deaths and recorded symptoms. For now one can look at the data by running

Example

```
rki_si_re = cov19.data_retrieval.RKIsituationreports(True)
print(rki_si_re.data)
```

Todo: Filter functions for ICU, Symptoms and maybe even daily new cases for the respective categories.

__init__ (*auto_download=False*)

On init of this class the base Retrieval Class **__init__** is called, with rki situation reports specific arguments.

Parameters **auto_download** (*bool, optional*) – Whether or not to automatically call the **download_all_available_data()** method. One should explicitly call this method for more configuration options (default: false)

download_all_available_data (*force_local=False, force_download=False*)

Attempts to download from the main url (self.url_csv) which was given on initialization. If this fails download from the fallbacks. It can also be specified to use the local files or to force the download. The download methods get inherited from the base retrieval class.

Parameters

- **force_local** (*bool, optional*) – If True forces to load the local files.
- **force_download** (*bool, optional*) – If True forces the download of new files

6.5 Google

class covid19_inference.data_retrieval.**GOOGLE** (*auto_download=False*)

This class can be used to retrieve the mobility dataset from [Google](#).

Example

```
gl = cov19.data_retrieval.GOOGLE()
gl.download_all_available_data()

#Access the data by
gl.data
#or
gl.get_changes(filter)
```

__init__ (*auto_download=False*)

On init of this class the base Retrieval Class **__init__** is called, with google specific arguments.

Parameters **auto_download** (*bool, optional*) – Whether or not to automatically call the **download_all_available_data()** method. One should explicitly call this method for more configuration options (default: false)

download_all_available_data (*force_local=False, force_download=False*)

Attempts to download from the main url (self.url_csv) which was given on initialization. If this fails download from the fallbacks. It can also be specified to use the local files or to force the download. The download methods get inherited from the base retrieval class.

Parameters

- **force_local** (*bool, optional*) – If True forces to load the local files.

- **force_download**(*bool*, *optional*) – If True forces the download of new files

get_changes(*country: str*, *state: str = None*, *region: str = None*, *data_begin: datetime.datetime = None*, *data_end: datetime.datetime = None*)

Returns a dataframe with the relative changes in mobility to a baseline, provided by google. They are separated into “retail and recreation”, “grocery and pharmacy”, “parks”, “transit”, “workplaces” and “residential”. Filterable for country, state and region and date.

Parameters

- **country**(*str*) – Selected country for the mobility data.
- **state**(*str*, *optional*) – State for the selected data if no value is selected the whole country is chosen
- **region**(*str*, *optional*) – Region for the selected data if no value is selected the whole region/country is chosen
- **data_end**(*data_begin*,) – Filter for the desired time period

Returns *pandas.DataFrame*

get_possible_counties_states_regions()

Can be used to obtain all different possible countries with there corresponding possible states and regions.

Returns *pandas.DataFrame*

6.6 Our World in Data

class covid19_inference.data_retrieval.OWD(*auto_download=False*)

This class can be used to retrieve the testings dataset from [Our World in Data](#).

Example

```
owd = cov19.data_retrieval.OWD()
owd.download_all_available_data()
```

__init__(*auto_download=False*)

On init of this class the base Retrieval Class **__init__** is called, with google specific arguments.

Parameters **auto_download**(*bool*, *optional*) – Whether or not to automatically call the **download_all_available_data()** method. One should explicitly call this method for more configuration options (default: false)

download_all_available_data(*force_local=False*, *force_download=False*)

Attempts to download from the main url (self.url_csv) which was given on initialization. If this fails download from the fallbacks. It can also be specified to use the local files or to force the download. The download methods get inhereted from the base retrieval class.

Parameters

- **force_local**(*bool*, *optional*) – If True forces to load the local files.
- **force_download**(*bool*, *optional*) – If True forces the download of new files

get_possible_countries()

Can be used to obtain all different possible countries in the dataset.

Returns *pandas.DataFrame*

get_total (*value='tests', country=None, data_begin=None, data_end=None*)

Retrieves all new cases from the Our World in Data dataset as a DataFrame with datetime index. Can be filtered by value, country and state, if only a country is given all available states get summed up.

Parameters

- **value** (*str*) – Which data to return, possible values are - “confirmed”, - “tests”, - “deaths” (default: “confirmed”)
- **country** (*str*) – name of the country
- **begin_date** (*datetime.datetime, optional*) – initial date for the returned data, if no value is given the first date in the dataset is used
- **end_date** (*datetime.datetime, optional*) – last date for the returned data, if no value is given the most recent date in the dataset is used

Returns *pandas.DataFrame* – table with new cases and the date as index

get_new (*value='tests', country=None, data_begin=None, data_end=None*)

Retrieves all new cases from the Our World in Data dataset as a DataFrame with datetime index. casesn be filtered by value, country and state, if only a country is given all available states get summed up.

Parameters

- **value** (*str*) – Which data to return, possible values are - “confirmed”, - “tests”, - “deaths” (default: “confirmed”)
- **country** (*str*) – name of the country
- **begin_date** (*datetime.datetime, optional*) – initial date for the returned data, if no value is given the first date in the dataset is used
- **end_date** (*datetime.datetime, optional*) – last date for the returned data, if no value is given the most recent date in the dataset is used

Returns *pandas.DataFrame* – table with new cases and the date as index

6.7 Financial times

class covid19_inference.data_retrieval.FINANCIAL_TIMES (*auto_download=False*)

This class can be used to retrieve the excess mortality data from the Financial Times [github repository](#).

Example

```
ft = cov19.data_retrieval.FINANCIAL_TIMES()
ft.download_all_available_data()

#Access the data by
ft.data
#or
ft.get(filter) #see below
```

__init__ (*auto_download=False*)

On init of this class the base Retrieval Class **__init__** is called, with financial times specific arguments.

Parameters **auto_download** (*bool, optional*) – Whether or not to automatically call the `download_all_available_data()` method. One should explicitly call this method for more configuration options (default: false)

download_all_available_data (*force_local=False, force_download=False*)

Attempts to download from the main url (self.url_csv) which was given on initialization. If this fails download from the fallbacks. It can also be specified to use the local files or to force the download. The download methods get inherited from the base retrieval class.

Parameters

- **force_local** (*bool, optional*) – If True forces to load the local files.
- **force_download** (*bool, optional*) – If True forces the download of new files

get (*value='excess_deaths', country: str = 'Germany', state: str = None, data_begin: datetime.datetime = None, data_end: datetime.datetime = None*)

Retrieves specific data from the dataset, can be filtered by date, country and state.

Parameters

- **value** (*str, optional*) – Which data to return, possible values are - “deaths”, - “expected_deaths”, - “excess_deaths”, - “excess_deaths_pct” (default: “excess_deaths”)
- **country** (*str, optional*) –
- **state** (*str, optional*) – Possible countries and states can be retrieved by the *get_possible_countries_states()* method.
- **begin_date** (*datetime.datetime, optional*) – First day that should be filtered
- **end_date** (*datetime.datetime, optional*) – Last day that should be filtered

get_possible_countries_states ()

Can be used to obtain all different possible countries with there corresponding possible states and regions.

Returns *pandas.DataFrame*

6.8 Oxford COVID-19 Government Response Tracker

class covid19_inference.data_retrieval.OxCGRT (*auto_download=False*)

This class can be used to retrieve the dataset on government policies from the [Oxford Covid-19 Government Response Tracker](#).

Example

```
gov_pol = cov19.data_retrieval.OxCGRT()
gov_pol.download_all_available_data()
```

__init__ (*auto_download=False*)

On init of this class the base Retrieval Class **__init__** is called, with google specific arguments.

Parameters **auto_download** (*bool, optional*) – Whether or not to automatically call the *download_all_available_data()* method. One should explicitly call this method for more configuration options (default: false)

download_all_available_data (*force_local=False, force_download=False*)

Attempts to download from the main url (self.url_csv) which was given on initialization. If this fails download from the fallbacks. It can also be specified to use the local files or to force the download. The download methods get inherited from the base retrieval class.

Parameters

- **force_local** (*bool*, *optional*) – If True forces to load the local files.
- **force_download** (*bool*, *optional*) – If True forces the download of new files

get_possible_countries ()

Can be used to obtain all different possible countries in the dataset.

Returns *pandas.DataFrame*

get_possible_policies ()

Can be used to obtain all policies in there corresponding categories possible countries in the dataset.

Returns *dict*

get_change_points (*policies*, *country*)

Returns a list of change points, depending on the selected measure and country.

Parameters

- **policies** (*str*, *array of str*) – The wanted policies. Can be an array of strings, use `get_possible_policies()` to get a dict of possible policies.
- **country** (*str*) – Filter for country, use `get_possible_countries()` to get a list of possible ones.

Returns *array of dicts*

get_time_data (*policy*, *country*, *data_begin=None*, *data_end=None*)

Parameters

- **policy** (*str*) – The wanted policy.
- **country** (*str*) – Filter for country, use `get_possible_countries()` to get a list of possible ones.
- **data_begin** (*datetime.datetime*, *optional*) – initial date for the returned data, if no value is given the first date in the dataset is used, if none is given could yield errors
- **data_end** (*datetime.datetime*, *optional*) – last date for the returned data, if no value is given the most recent date in the dataset is used

Returns Pandas dataframe with policy

6.9 Base Retrieval Class

```
class covid19_inference.data_retrieval.retrieval.Retrieval (name, url_csv,
                                                         fallbacks, up-
                                                         date_interval=None,
                                                         **kwargs)
```

Each source class should inherit this base retrieval class, it streamlines alot of base functions. It manages downloads, multiple fallbacks and local backups via timestamp. At init of the parent class the Retrieval init should be called with the following arguments, these get saved as attributes.

An example for the usage can be seen in the `_Google`, `_RKI` and `_JHU` source files.

```
__init__ (name, url_csv, fallbacks, update_interval=None, **kwargs)
```

Parameters

- **name** (*str*) – A name for the Parent class, mainly used for the local file backup.

- **url_csv** (*str*) – The url to the main dataset as csv, if an empty string is supplied the fallback routines get used.
- **fallbacks** (*array*) – Fallbacks can be filepaths to local or online sources or even methods defined in the parent class.
- **update_interval** (*datetime.timedelta*) – If the local file is older than the update_interval it gets updated once the download all function is called.

_download_csv_from_source (*filepath*, ***kwargs*)

Uses pandas read csv to download the csv file. The possible kwargs can be seen in the pandas [documentation](#).

These kwargs can vary for the different parent classes and should be defined there!

filepath [str] Full path to the desired csv file

Returns *bool* – True if the retrieval was a success, False if it failed

_fallback_handler ()

Recursively iterate over all fallbacks and try to execute subroutines depending on the type of fallback.

_timestamp_local_old (*force_local=False*) → bool

1. Get timestamp if it exists
2. compare with the date today
3. update if data is older than set intervall -> can be parent dependant

_save_to_local ()

Creates a local backup for the self.data pandas.DataFrame. And a timestamp for the source.

PLOTTING

We provide a lot of plotting functions which can be used to recreate our plots or create completely new visualizations. If you are familiar with `matplotlib` it should be no problem to use them extensively.

We provide three different types of functions here:

- *High level functions* These can be used create figures similar to our paper Dehning et al. arXiv:2004.01105. The are neat little one liners which create a good looking plot from our model, but do not have a lot of customization options.
- *Low level functions* These extend the normal `matplotlib` plotting functions and can be used to plot arbitrary data. They have a lot of customization options, it could take some time to get nicely looking plots with these functions though.
- *Helper functions* These are mainly functions that manipulate data or retrieve data from our model. These do not have to be used most of the time and are only documented here for completeness.

If one just wants to recreate our figures with a different color. The easiest was is to change the default rc parameters.

```
covid19_inference.plot.get_rcparams_default()
```

Get a Param (dict) of the default parameters. Here we set our default values. Assigned once to module variable `rcParamsDefault` on load.

```
covid19_inference.plot.set_rcparams(par)
```

Sets the rcparameters used for plotting, provided instance of *Param* has to have the following keys (attributes):

Variables

- **locale** (*str*) – region settings, passed to `setlocale()`. Default: “en_US”
- **date_format** (*str*) – Format the date on the x axis of time-like data (see <https://strftime.org/>) example April 1 2020: “%m/%d” 04/01, “%-d. %B” 1. April Default “%b %-d”, becomes April 1
- **date_show_minor_ticks** (*bool*) – whether to show the minor ticks (for every day). Default: True
- **rasterization_zorder** (*int or None*) – Rasterizes plotted content below this value, set to None to keep everything a vector, Default: -1
- **draw_ci_95** (*bool*) – For timeseries plots, indicate 95% Confidence interval via fill between. Default: True
- **draw_ci_75** (*bool*) – For timeseries plots, indicate 75% Confidence interval via fill between. Default: False
- **draw_ci_50** (*bool*) – For timeseries plots, indicate 50% Confidence interval via fill between. Default: False

- **color_model** (*str*) – Base color used for model plots, mpl compatible color code “C0”, “#303030” Default : “tab:green”
- **color_data** (*str*) – Base color used for data Default : “tab:blue”
- **color_annot** (*str*) – Color to use for annotations Default : “#646464”
- **color_prior** (*str*) – Color to used for priors in distributions Default : “#708090”

Example

```
# Get default parameter
pars = cov.plot.get_rcparams_default()

# Change parameters
pars["locale"]="de_DE"
pars["color_data"]="tab:purple"

# Set parameters
cov.plot.set_rcparams(pars)
```

7.1 High level functions

```
covid19_inference.plot.timeseries_overview(model, trace, start=None, end=None, re-
                                           gion=None, color=None, save_to=None,
                                           offset=0, annotate_constrained=True,
                                           annotate_watermark=True, axes=None,
                                           forecast_label='Forecast', forecast_
                                           cast_heading='$\\bf Forecasts\\V:$',
                                           add_more_later=False)
```

Create the time series overview similar to our paper. Dehning et al. arXiv:2004.01105 Contains λ , new cases, and cumulative cases.

Parameters

- **model** (*Cov19Model*) –
- **trace** (*trace instance*) – needed for the data
- **offset** (*int*) – offset that needs to be added to the (cumulative sum of) new cases at time `model.data_begin` to arrive at cumulative cases
- **start** (*datetime.datetime*) – only used to set xrange in the end
- **end** (*datetime.datetime*) – only used to set xrange in the end
- **color** (*str*) – main color to use, default from `rcParam`
- **save_to** (*str or None*) – path where to save the figures. default: `None`, not saving figures
- **annotate_constrained** (*bool*) – show the unconstrained constrained annotation in `lambda` panel
- **annotate_watermark** (*bool*) – show our watermark
- **axes** (*np.array of mpl axes*) – provide an array of existing axes (from previously calling this function) to add more traces. Data will not be added again. Ideally call this first with `add_more_later=True`

- **forecast_label** (*str*) – legend label for the forecast, default: “Forecast”
- **forecast_heading** (*str*) – if *add_more_later*, how to label the forecast section. default: “\$bf Forecasts!:\$”,
- **add_more_later** (*bool*) – set this to true if you plan to add multiple models to the plot. changes the layout (and the color of the fit to past data)

Returns

- **fig** (*mpl figure*)
- **axes** (*np array of mpl axeses (insets not included)*)

Todo:

- Replace *offset* with an instance of data class that should yield the cumulative cases. we should not to calculations here.

7.2 Low level functions

`covid19_inference.plot._timeseries(x, y, ax=None, what='data', draw_ci_95=None, draw_ci_75=None, draw_ci_50=None, **kwargs)`

low-level function to plot anything that has a date on the x-axis.

Parameters

- **x** (*array of datetime.datetime*) – times for the x axis
- **y** (*array, 1d or 2d*) – data to plot. if 2d, we plot the CI as *fill_between* (if CI enabled in rc params) if 2d, then first dim is realization and second dim is time matching *x* if 1d then first tim is time matching *x*
- **ax** (*mpl axes element, optional*) – plot into an existing axes element. default: None
- **what** (*str, optional*) – what type of data is provided in x. sets the style used for plotting: * *data* for data points * *fcst* for model forecast (prediction) * *model* for model reproduction of data (past)
- **kwargs** (*dict, optional*) – directly passed to plotting mpl.

Returns *ax*

`covid19_inference.plot._distribution(model, trace, key, ax=None, color=None, draw_prior=True)`

Todo: documentation

7.2.1 Example

In this example we want to use the low level time series function to plot the new daily cases and deaths reported by the Robert Koch institute.

```
import datetime
import matplotlib.pyplot as plt
import covid19_inference as cov19

# Data retrieval i.e. download new data from RobertKochInstitute
rki = cov19.data_retrieval.RKI()
rki.download_all_available_data()

new_deaths = rki.get_new(
    value = "deaths",
    data_begin=datetime.datetime(2020,3,15), #arbitrary data
    data_end=datetime.datetime.today())

new_cases = rki.get_new(
    value = "confirmed",
    data_begin=datetime.datetime(2020,3,15),
    data_end=datetime.datetime.today())

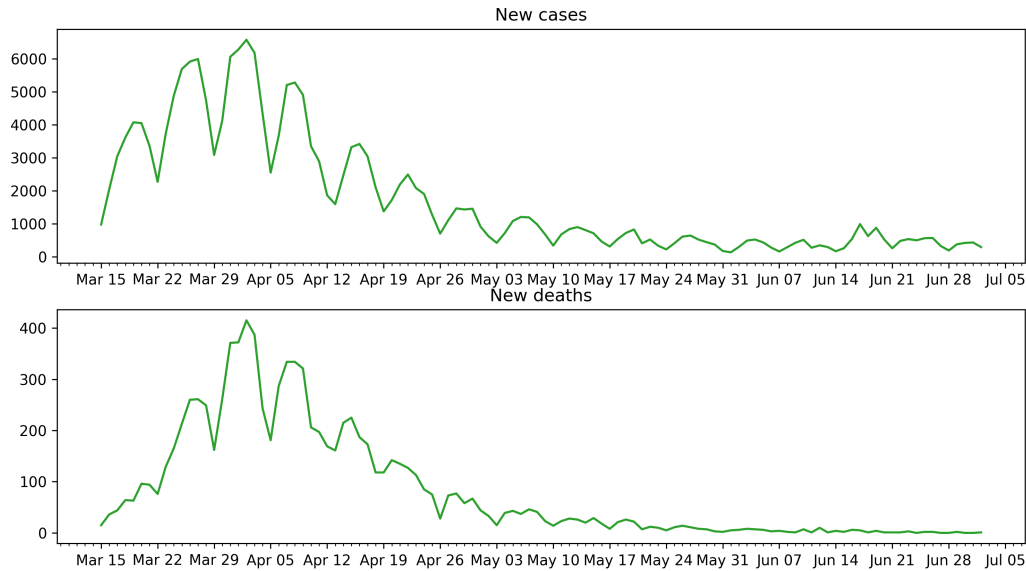
# Create a multiplot
fig, axes = plt.subplots(2,1, figsize=(12,6))

# Plot the new cases onto axes[0]
cov19.plot._timeseries(
    x=new_cases.index,
    y=new_cases,
    ax=axes[0],
    what="model", #We define model here to get a line instead of data points
)

# Plot the new deaths onto axes[1]
cov19.plot._timeseries(
    x=new_deaths.index,
    y=new_deaths,
    ax=axes[1],
    what="model", #We define model here to get a line instead of data points
)

# Label the plots
axes[0].set_title("New cases")
axes[1].set_title("New deaths")

# Show the figure
fig.show()
```

7.3 Helper functions

`covid19_inference.plot._get_array_from_trace_via_date` (*model*, *trace*, *var*, *start=None*, *end=None*, *dates=None*)

Parameters

- **model** (*model instance*) –
- **trace** (*trace instance*) –
- **var** (*str*) – the variable name in the trace
- **start** (*datetime.datetime*) – get all data for a range from *start* to *end*. (both boundary dates included)
- **end** (*datetime.datetime*) –
- **dates** (*list of datetime.datetime objects, optional*) – the dates for which to get the data. Default: None, will return all available data.

Returns

- **data** (*nd array, 3 dim*) – the elements from the trace matching the dates. dimensions are as follows 0 samples, if no samples only one entry 1 data with time matching the returned *dates* (if compatible variable) 2 region, if no regions only one entry
- **dates** (*pandas DatetimeIndex*) – the matching dates. this is essentially an array of dates than can be passed to matplotlib

Example

```
import covid19_inference as cov
model, trace = cov.create_example_instance()
y, x = cov.plot._get_array_from_trace_via_date(
    model, trace, "lambda_t", model.data_begin, model.data_end
)
ax = cov.plot._timeseries(x, y[:, :, 0], what="model")
```

`covid19_inference.plot._new_cases_to_cum_cases(x, y, what, offset=0)`
 so this conversion got ugly really quickly. need to check dimensionality of y

Parameters

- **x** (*pandas DatetimeIndex array*) – will be padded accordingly
- **y** (*1d or 2d numpy array*) – new cases matching dates in x. if 1d, we assume raw data (no samples) if 2d, we assume results from trace with 0th dim samples and 1st new cases matching x
- **what** (*str*) – dirty workaround to differentiate between traces and raw data “data” or “trace”
- **offset** (*int or array like*) – added to cum sum (should be the known cumulative case number at the first date of provided in x)

Returns

- **x_cum** (*pandas DatetimeIndex array*) – dates of the cumulative cases
- **y_cum** (*nd array*) – cumulative cases matching x_cum and the dimension of input y

Example

```
cum_dates, cum_cases = _new_cases_to_cum_cases(new_dates, new_cases)
```

`covid19_inference.plot._label_for_varname(key)`
 get the label for trace variable names (e.g. placed on top of distributions)
 default for unknown keys is the key itself

Todo: add more parameters

`covid19_inference.plot._math_for_varname(key)`
 get the math string for trace variable name, e.g. used to print the median representation.
 default for unknown keys is “\$x\$”

Todo: use regex

`covid19_inference.plot._days_to_mpl_dates(days, origin)`
 convert days as number to matplotlib compatible date numbers. this is not the same as pandas dateindices, but numpy operations work on them

Parameters

- **days** (*number, 1d array of numbers*) – the day number to convert, e.g. integer values ≥ 0 , one day per int

- **origin**(*datetime.datetime*) – the date object corresponding to day 0

`covid19_inference.plot._get_mpl_text_coordinates` (*text*, *ax*)

helper to get coordinates of a text object in the coordinates of the axes element [0,1]. used for the rectangle backdrop.

Returns: *x_min*, *x_max*, *y_min*, *y_max*

`covid19_inference.plot._add_mpl_rect_around_text` (*text_list*, *ax*, *x_padding=0.05*,
y_padding=0.05, ***kwargs*)

add a rectangle to the axes (behind the text)

provide a list of text elements and possible options passed to `mpl.patches.Rectangle` e.g. `facecolor="grey"`, `alpha=0.2`, `zorder=99`,

`covid19_inference.plot._rx_cp_id` (*key*)

get the change_point index from a compatible variable name

`covid19_inference.plot._rx_hc_id` (*key*)

get the L1 / L2 value of hierarchical variable name

`covid19_inference.plot._format_k` (*prec*)

format yaxis 10_000 as 10 k. `_format_k(0)(1200, 1000.0)` gives "1 k" `_format_k(1)(1200, 1000.0)` gives "1.2 k"

`covid19_inference.plot._format_date_xticks` (*ax*, *minor=None*)

`covid19_inference.plot._truncate_number` (*number*, *precision*)

`covid19_inference.plot._string_median_CI` (*arr*, *prec=2*)

`covid19_inference.plot._add_watermark` (*ax*, *mark='Dehning et al. 10.1126/science.abb9789'*)

Add our arxiv url to an axes as (upper right) title

class `covid19_inference.plot.Param`

Parameters Base Class (a tweaked dict)

We inherit from dict and also provide keys as attributes, mapped to `.get()` of dict. This avoids the `KeyError`: if getting parameters via `.the_pname`, we return `None` when the param does not exist.

Avoid using keys that have the same name as class functions etc.

Example

```
foo = Param(lorem="ipsum")
print(foo.lorem)
>>> 'ipsum'
print(foo.does_not_exist is None)
>>> True
```


VARIABLES SAVED IN THE TRACE

The trace by default contains the following parameters in the SIR/SEIR hierarchical model. XXX denotes a number.

Name in trace	Dimensions	Created by function
lambda_XXX_L1	samples	lambda_t_with_sigmoids/make_change_point_RVs
lambda_XXX_L2	samples x re- gions	lambda_t_with_sigmoids/make_change_point_RVs
sigma_lambda_XXX_L1	samples	lambda_t_with_sigmoids/make_change_point_RVs
transient_day_XXX_L1	samples	lambda_t_with_sigmoids/make_change_point_RVs
transient_day_XXX_L2	samples x re- gions	lambda_t_with_sigmoids/make_change_point_RVs
sigma_transient_day_XXX_L2	samples	lambda_t_with_sigmoids/make_change_point_RVs
transient_len_XXX_L1	samples	lambda_t_with_sigmoids/make_change_point_RVs
transient_len_XXX_L2	samples x re- gions	lambda_t_with_sigmoids/make_change_point_RVs
sigma_transient_len_XXX_L2	samples	lambda_t_with_sigmoids/make_change_point_RVs
delay_L1	samples	delay_cases
delay_L2	samples x re- gions	delay_cases
sigma_delay_L2	samples	delay_cases
weekend_factor_L1	samples	week_modulation
weekend_factor_L2	samples x re- gions	week_modulation
sigma_weekend_factor_L2	samples	week_modulation
offset_modulation	samples	week_modulation
new_cases_raw	samples x time x regions	week_modulation
mu	samples	SIR/SEIR
I_begin	samples x re- gions	SIR/SEIR
new_cases	samples x time x regions	SIR/SEIR
sigma_obs	samples x re- gions	SIR/SEIR
new_E_begin	samples x 11 x regions	SEIR
median_incubation_start	samples	SEIR
median_incubation_start_L2	samples x re- gions	SEIR
sigma_median_incubation_start_L2	samples	SEIR

For the non-hierarchical model, variables with _L2 suffixes are missing, and _L1 suffixes are removed from the name.

CONTRIBUTING

We always welcome contributions. Here we gather some guidelines to make the process as smooth as possible.

9.1 Beginning

To see where help is needed, go to the issues page on Github. If you want to begin on an issue, make a comment below and begin a draft pull request: <https://github.blog/2019-02-14-introducing-draft-pull-requests/> You can link the pull request on the right side of the commit to it.

When you have finished working on the issue, change it to a regular pull request. Check that there are no conflicts to the current master (<https://www.digitalocean.com/community/tutorials/how-to-rebase-and-update-a-pull-request>)

9.2 Code formatting

We use black <https://github.com/psf/black> as automatic code formatter. Please run your code through it before you open a pull request.

We do not check for formatting in the testing (travis) but have a config in the repository that uses black as a pre-commit hook.

This snippet should get you up and running:

```
conda install -c conda-forge black
conda install -c conda-forge pre-commit
pre-commit install
```

Try to stick to PEP 8. You can use [type annotations](#) if you want, but it is not necessary or encouraged.

9.3 Testing

We use travis and pytest. To check your changes locally:

```
python -m pytest --log-level=INFO --log-cli-level=INFO
```

It would be great if anything that is added to the code-base has an according test in the `tests` folder. We are not there yet, but it is on the todo. Be encouraged to add tests :)

9.4 Documentation

The documentation is built using Sphinx from the docstrings. To test it before submitting, navigate with a terminal to the docs/ directory. Install if necessary the packages listed in `piprequirements.txt` run `make html`. The documentation can then be accessed in `docs/_build/html/index.html`. As an example you can look at the documentation of `covid19_inference.model.SIR()`

DEBUGGING

This is some pointer to help debugging models and sampling issues

10.1 General approach for nans/inf during sampling

The idea of this approach is to sample from the prior and then run the model. If the log likelihood is then $-\infty$, there is a problem, and the output of the theano functions is inspected.

Sample from prior:

```
from pymc3.util import (
    get_untransformed_name,
    is_transformed_name)

varnames = list(map(str, model.vars))

for name in varnames:
    if is_transformed_name(name):
        varnames.append(get_untransformed_name(name))

with model:
    points = pm.sample_prior_predictive(var_names = varnames)
    points_list = []
    for i in range(len(next(iter(points.values())))):
        point_dict = {}
        for name, val in points.items():
            point_dict[name] = val[i]
        points_list.append(point_dict)
```

points_list is a list of the starting points for the model, sampled from the prior. Then to run the model and print the log-likelihood:

```
fn = model.fn(model.logpt)

for point in points_list[:]:
    print(fn(point))
```

To monitor the output and save it in a file (for use in ipython). Learned from: http://deeplearning.net/software/theano/tutorial/debug_faq.html#how-do-i-step-through-a-compiled-function

```
%%capture cap --no-stderr
def inspect_inputs(i, node, fn):
    print(i, node, "input(s) value(s):", [input[0] for input in fn.inputs],
```

(continues on next page)

(continued from previous page)

```

        end='')

def inspect_outputs(i, node, fn):
    print(" output(s) value(s):", [output[0] for output in fn.outputs])

fn_monitor = model.fn(model.logpt,
                       mode=theano.compile.MonitorMode(
                           pre_func=inspect_inputs,
                           post_func=inspect_outputs).excluding(
                               'local_elemwise_fusion', 'inplace'))

fn = model.fn(model.logpt)

for point in points_list[:]:
    if fn(point) < -1e10:
        print(fn_monitor(point))
        break

```

In a new cell:

```

with open('output.txt', 'w') as f:
    f.write(cap.stdout)

```

Then one can open output.txt in a text editor, and follow from where infs or nans come from by following the inputs and outputs up through the graph

10.2 Sampler: MCMC (Nuts)

10.2.1 Divergences

During sampling, a significant fraction of divergences are a sign that the sampler doesn't sample the whole posterior. In this case the model should be reparametrized. See this tutorial for a typical example: https://docs.pymc.io/notebooks/Diagnosing_biased_Inference_with_Divergences.html

And these papers include some more details: <https://pdfs.semanticscholar.org/7b85/fb48a077c679c325433fbe13b87560e12886.pdf> <https://arxiv.org/pdf/1312.0906.pdf>

10.2.2 Bad initial energy

This typically occurs when some distribution in the model can't be evaluated at the starting point of chain. Run this to see which distribution throws nans or infs:

```

for RV in model.basic_RVs:
    print(RV.name, RV.logp(model.test_point))

```

However, this only evaluates the test_point. When PyMC3 starts sampling, it adds some jitter around this test_point, which then could lead to nans. Run this to add jitter and then evaluate the logp:

```

chains=4
for RV in model.basic_RVs:
    print(RV.name)

```

(continues on next page)

(continued from previous page)

```

for _ in range(chains):
    mean = {var: val.copy() for var, val in model.test_point.items()}
    for val in mean.values():
        val[...] += 2 * np.random.rand(*val.shape) - 1
    print(RV.logp(mean))

```

This code could potentially change in newer versions of PyMC3 (this is tested in 3.8). Read the source code, to know which random jitter PyMC3 currently adds at beginning.

10.2.3 Nans occur during sampling

Run the sampler with the debug mode of Theano.

```

from theano.compile.nanguardmode import NanGuardMode
mode = NanGuardMode(nan_is_error=True, inf_is_error=False, big_is_error=False,
                    optimizer='ol')
trace = pm.sample(mode=mode)

```

However this doesn't lead to helpful messages if nans occur during gradient evaluations.

10.3 Sampler: Variational Inference

There exist some ways to track parameters during sampling. An example:

```

with model:
    advi = pm.ADVI()
    print(advi.approx.group)

    print(advi.approx.mean.eval())
    print(advi.approx.std.eval())

    tracker = pm.callbacks.Tracker(
        mean=advi.approx.mean.eval, # callable that returns mean
        std=advi.approx.std.eval    # callable that returns std
    )

    approx = advi.fit(100000, callbacks=[tracker],
                     obj_optimizer=pm.adagrad_window(learning_rate=1e-3),
                     #total_grad_norm_constraint=10) #constrains maximal gradient,
    ↪could help

    print(approx.groups[0].bij.rmap(approx.params[0].eval()))

    plt.plot(tracker['mean'])
    plt.plot(tracker['std'])

```

For the tracker, the order of the parameters is saved in:

```
approx.ordering.by_name
```

and the indices encoded there in the slc field. To plot the mean value of a given parameter name, run:

```
plt.plot(np.array(tracker['mean']))[:, approx.ordering.by_name['name'].slc]
```

The debug mode is set with the following parameter:

```
from theano.compile.nanguardmode import NanGuardMode
mode = NanGuardMode(nan_is_error=True, inf_is_error=False, big_is_error=False,
                    optimizer='ol')
approx = advi.fit(100000, callbacks=[tracker],
                 fn_kwargs={'mode':mode})
```

INDICES AND TABLES

- `genindex`
- `modindex`
- `search`

BIBLIOGRAPHY

- [Nishiura2020] Nishiura, H.; Linton, N. M.; Akhmetzhanov, A. R. Serial Interval of Novel Coronavirus (COVID-19) Infections. *Int. J. Infect. Dis.* 2020, 93, 284–286. <https://doi.org/10.1016/j.ijid.2020.02.060>.
- [Lauer2020] Lauer, S. A.; Grantz, K. H.; Bi, Q.; Jones, F. K.; Zheng, Q.; Meredith, H. R.; Azman, A. S.; Reich, N. G.; Lessler, J. The Incubation Period of Coronavirus Disease 2019 (COVID-19) From Publicly Reported Confirmed Cases: Estimation and Application. *Ann Intern Med* 2020. <https://doi.org/10.7326/M20-0504>.
- [Lange1989] Lange, K., Roderick J. A. Little, & Jeremy M. G. Taylor. (1989). Robust Statistical Modeling Using the *t* Distribution. *Journal of the American Statistical Association*, 84(408), 881-896. doi:10.2307/2290063

PYTHON MODULE INDEX

C

covid19_inference, ??
covid19_inference.data_retrieval.retrieval,
 21
covid19_inference.model.utility, 19

Symbols

<code>__init__()</code> (<i>covid19_inference.data_retrieval.FINANCIAL_TIMES</i> <i>covid19_inference.plot</i>), 38	<code>_new_cases_to_cum_cases()</code> (in module <i>covid19_inference.plot</i>), 38
<code>__init__()</code> (<i>covid19_inference.data_retrieval.GOOGLE</i> <i>covid19_inference.plot</i>), 39	<code>_rx_cp_id()</code> (in module <i>covid19_inference.plot</i>), 39
<code>__init__()</code> (<i>covid19_inference.data_retrieval.JHU</i> <i>covid19_inference.plot</i>), 39	<code>_rx_hc_id()</code> (in module <i>covid19_inference.plot</i>), 39
<code>__init__()</code> (<i>covid19_inference.data_retrieval.OWD</i> <i>covid19_inference.plot</i>), 39	<code>_save_to_local()</code> (<i>covid19_inference.data_retrieval.retrieval.Retrieval</i> <i>covid19_inference.plot</i>), 32
<code>__init__()</code> (<i>covid19_inference.data_retrieval.OxCVRT</i> <i>covid19_inference.plot</i>), 39	<code>_string_median_CI()</code> (in module <i>covid19_inference.plot</i>), 39
<code>__init__()</code> (<i>covid19_inference.data_retrieval.RKI</i> <i>covid19_inference.plot</i>), 35	<code>_timeseries()</code> (in module <i>covid19_inference.plot</i>), 35
<code>__init__()</code> (<i>covid19_inference.data_retrieval.RKIsituationreports</i> <i>covid19_inference.plot</i>), 35	<code>_timestamp_local_old()</code> (<i>covid19_inference.data_retrieval.retrieval.Retrieval</i> <i>covid19_inference.plot</i>), 32
<code>__init__()</code> (<i>covid19_inference.data_retrieval.retrieval.Retrieval</i> <i>covid19_inference.plot</i>), 39	<code>truncate_number()</code> (in module <i>covid19_inference.plot</i>), 39
<code>_add_mpl_rect_around_text()</code> (in module <i>covid19_inference.plot</i>), 39	B
<code>_add_watermark()</code> (in module <i>covid19_inference.plot</i>), 39	<code>backup_instances()</code> (in module <i>covid19_inference.data_retrieval.retrieval</i>), 21
<code>_days_to_mpl_dates()</code> (in module <i>covid19_inference.plot</i>), 38	C
<code>_distribution()</code> (in module <i>covid19_inference.plot</i>), 35	<code>Cov19Model</code> (class in <i>covid19_inference.model</i>), 11
<code>_download_csv_from_source()</code> (<i>covid19_inference.data_retrieval.retrieval.Retrieval</i> <i>covid19_inference.plot</i>), 35	<code>covid19_inference</code> (module), 1, 5
<code>_fallback_handler()</code> (<i>covid19_inference.data_retrieval.retrieval.Retrieval</i> <i>covid19_inference.plot</i>), 32	<code>covid19_inference.data_retrieval.retrieval</code> (module), 21
<code>_format_date_xticks()</code> (in module <i>covid19_inference.plot</i>), 39	<code>covid19_inference.model.utility</code> (module), 19
<code>_format_k()</code> (in module <i>covid19_inference.plot</i>), 39	D
<code>_get_array_from_trace_via_date()</code> (in module <i>covid19_inference.plot</i>), 37	<code>delay_cases()</code> (in module <i>covid19_inference.model</i>), 16
<code>_get_mpl_text_coordinates()</code> (in module <i>covid19_inference.plot</i>), 39	<code>download_all_available_data()</code> (<i>covid19_inference.data_retrieval.FINANCIAL_TIMES</i> <i>covid19_inference.plot</i>), 29
<code>_label_for_varname()</code> (in module <i>covid19_inference.plot</i>), 38	<code>download_all_available_data()</code> (<i>covid19_inference.data_retrieval.GOOGLE</i> <i>covid19_inference.plot</i>), 27
<code>_math_for_varname()</code> (in module <i>covid19_inference.plot</i>), 38	<code>download_all_available_data()</code> (<i>covid19_inference.data_retrieval.JHU</i> <i>covid19_inference.plot</i>), 22

`download_all_available_data()`
 (`covid19_inference.data_retrieval.OWD`
 method), 28
`download_all_available_data()`
 (`covid19_inference.data_retrieval.OxCGRT`
 method), 30
`download_all_available_data()`
 (`covid19_inference.data_retrieval.RKI`
 method), 24
`download_all_available_data()`
 (`covid19_inference.data_retrieval.RKIsituationreports`
 method), 27

F

`filter()` (`covid19_inference.data_retrieval.RKI`
 method), 25
`filter_all_bundesland()`
 (`covid19_inference.data_retrieval.RKI`
 method), 26
`filter_date()` (`covid19_inference.data_retrieval.JHU`
 method), 23
FINANCIAL_TIMES (class in `covid19_inference.data_retrieval`), 29

G

`get()` (`covid19_inference.data_retrieval.FINANCIAL_TIMES`
 method), 30
`get_change_points()`
 (`covid19_inference.data_retrieval.OxCGRT`
 method), 31
`get_changes()` (`covid19_inference.data_retrieval.GOOGLE`
 method), 28
`get_new()` (`covid19_inference.data_retrieval.JHU`
 method), 23
`get_new()` (`covid19_inference.data_retrieval.OWD`
 method), 29
`get_new()` (`covid19_inference.data_retrieval.RKI`
 method), 25
`get_possible_counties_states_regions()`
 (`covid19_inference.data_retrieval.GOOGLE`
 method), 28
`get_possible_countries()`
 (`covid19_inference.data_retrieval.OWD`
 method), 28
`get_possible_countries()`
 (`covid19_inference.data_retrieval.OxCGRT`
 method), 31
`get_possible_countries_states()`
 (`covid19_inference.data_retrieval.FINANCIAL_TIMES`
 method), 30
`get_possible_countries_states()`
 (`covid19_inference.data_retrieval.JHU`
 method), 24

`get_possible_policies()`
 (`covid19_inference.data_retrieval.OxCGRT`
 method), 31
`get_rcparams_default()` (in module
 covid19_inference.plot), 33
`get_time_data()` (`covid19_inference.data_retrieval.OxCGRT`
 method), 31
`get_total()` (`covid19_inference.data_retrieval.JHU`
 method), 23
`get_total()` (`covid19_inference.data_retrieval.OWD`
 method), 28
`get_total()` (`covid19_inference.data_retrieval.RKI`
 method), 24
`get_total_confirmed_deaths_recovered()`
 (`covid19_inference.data_retrieval.JHU`
 method), 22
GOOGLE (class in `covid19_inference.data_retrieval`), 27

H

`hierarchical_normal()` (in module
 covid19_inference.model.utility), 19

J

JHU (class in `covid19_inference.data_retrieval`), 22

L

`lambda_t_with_sigmoids()` (in module
 covid19_inference.model), 16

O

OWD (class in `covid19_inference.data_retrieval`), 28
OxCGRT (class in `covid19_inference.data_retrieval`), 30

P

Param (class in `covid19_inference.plot`), 39
`possible_age_groups()`
 (`covid19_inference.data_retrieval.RKI`
 method), 26

R

Retrieval (class in `covid19_inference.data_retrieval`), 31
RKI (class in `covid19_inference.data_retrieval`), 24
RKIsituationreports (class in `covid19_inference.data_retrieval`), 26

S

SEIR (in module `covid19_inference.model`), 13
`set_data_dir()` (in module
 covid19_inference.data_retrieval.retrieval),
 21

`set_rcparams()` (in module *covid19_inference.plot*),
33

`SIR()` (in module *covid19_inference.model*), 12

`student_t_likelihood()` (in module
covid19_inference.model), 15

T

`timeseries_overview()` (in module
covid19_inference.plot), 34

`tt_gamma()` (in module
covid19_inference.model.utility), 19

`tt_lognormal()` (in module
covid19_inference.model.utility), 19

U

`untransformed_freeRVs()`
(*covid19_inference.model.Cov19Model* prop-
erty), 12

W

`week_modulation()` (in module
covid19_inference.model), 18